42 m Truck-mounted
Concrete Boom Pump

HB42V



สามารถยึดใต้หลังคา
ต่ำสุด 8.55 m



ประหยัดน้ำมันกว่า 20%
หรือเพียง 0.36 L/m^3



รวมคัตซีน้ำหนักเบาเพียง
28430 kg



OCR XCMG SCHWING Stetter

HB42V

Technical data for travel

Overall dimensions (LxWxH)	10886x2540x3965 mm
Fuel type	Diesel oil
Displacement/Rated power	10.52/280 L/kW
Steering type	Steering Wheel
Axles amount	4
Wheel base	1850+2980+1350 mm
Tire specification	11R22.5-16PR
Wheel track(front wheel/rear wheel)	2055/1860 mm
Tire amount(excluding spare tire)	12
Total vehicle weight	28430 Kg
Seating capacity of the cab	2 Person
Approach angle/departure angle	15° / 10°
Max. speed	125 Km/h

Chassis

Model	GY2PS1A-XHT
Manufacturer	HINO

Engine

Model	P11C-VU
Rated power	280 kw/380 Hp

Valve


Change valve	Rock valve
Stroke per minute (High/Low Pressure)	31 t/min

Technical data for pumping operation

Theoretical throughput	130 m^3/h
Concrete pumping pressure	8.8 MPa
Max. diameter of concrete aggregate	40 mm
Delivery cylinder diameter & stroke length	ϕ236x1600 mm
Bucket capacity	0.6 m^3
Concrete pumping slump scope	8~23 cm
Lubrication methods	Automatic
Control mode	Manual/Remote
Max. pumping height	40.48 m
Reach depth	27.50 m
Slewing radius of boom	35.46 m
Slewing angle of boom	+-360°
Stretching angle of 1 section boom	90°
Stretching angle of 2 section boom	180°
Stretching angle of 3 section boom	180°
Stretching angle of 4 section boom	230°
Stretching angle of 5 section boom	210°

Outrigger span

Longitudinal span	7200 mm
Front outriggers	5910 mm
Rear outriggers	8260 mm

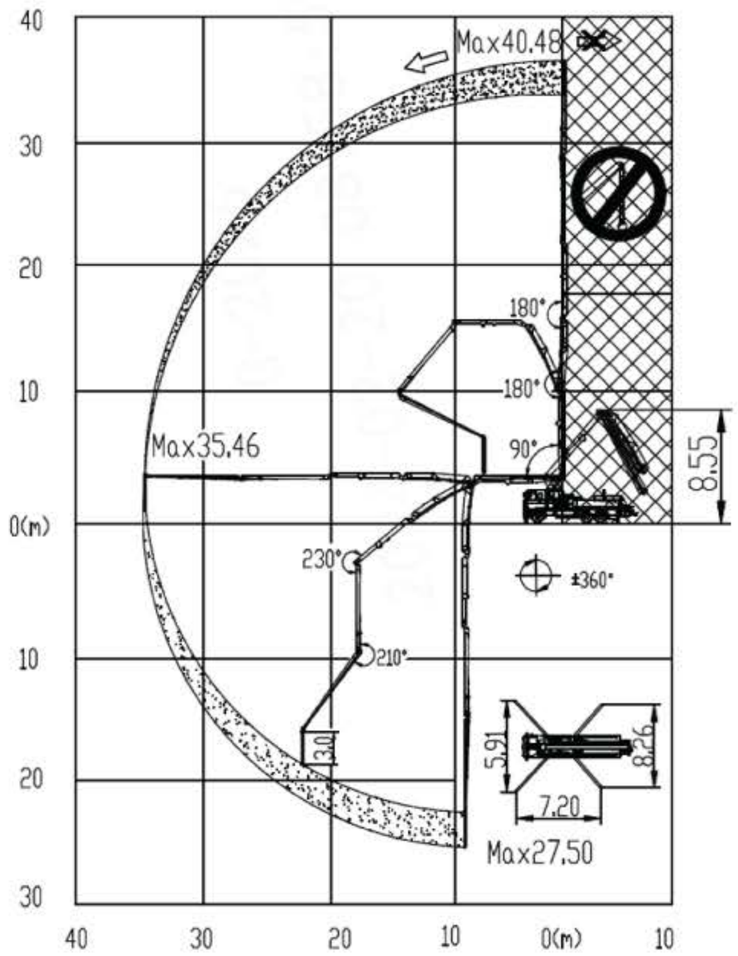

CONTACT US:

www.xcmgthailand.com info@ocr.co.th @xcmg_thailand @xcmgthailand XCMG Thailand 02-430-5555